

**Ultrasonic fluid level sensor for fluid in container**

Patent Number: DE19643956

Publication date: 1998-05-07

Inventor(s): MUENCH HANS-JOACHIM (DE); ZUR HORST-MEYER SANTER DR (DE); KRAUSE WERNER (DE)

Applicant(s):: SONOTEC DR ZUR HORST MEYER &amp; M (DE)

Requested Patent: ☐ DE19643956Application  
Number: DE19961043956 19961031

Priority Number(s): DE19961043956 19961031

IPC Classification: G01F23/296

EC Classification: G01F23/296, G01F23/296D, G01F23/296T

Equivalents:

---

**Abstract**

---

The ultrasonic transducer (1) and the receiver (2) are fitted to the outer wall of the vessel with their acoustic axes at an angle other than 90 deg. e.g. 45 deg. to the vessel wall. This arrangement guarantees transmission of the transverse wave into the vessel. The transmitter and receiver are fitted either on the same side or on opposite sides of the vessel. They can be either angled probes or standard probes with wedge transducers. This geometry eliminated interfering echoes within the vessel wall and increases measurement accuracy.

---

Data supplied from the esp@cenet database - I2

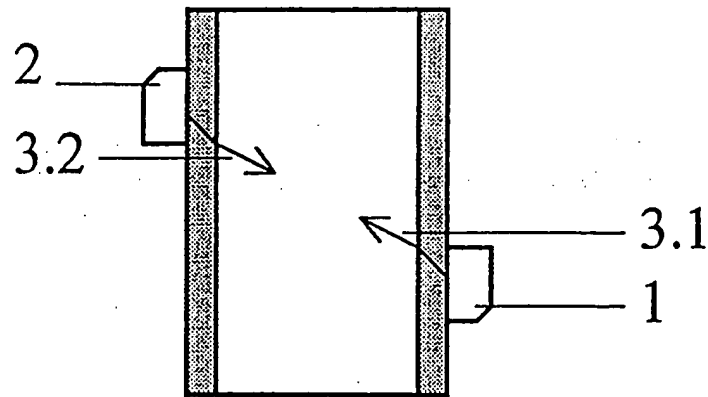


Fig. 1

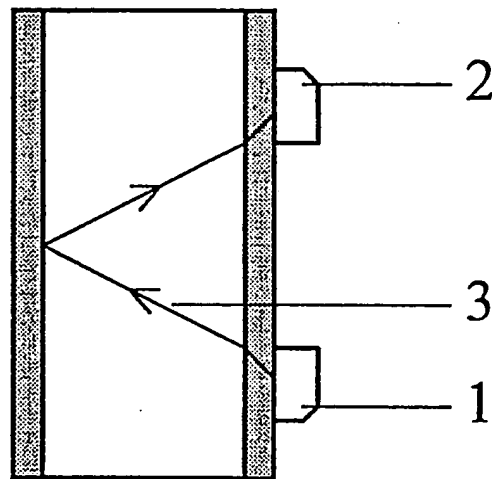


Fig. 2